

IN-LANE RUMBLE BARS



P R E F O R M E D T H E R M O P L A S T I C P A V E M E N T M A R K I N G S



VISUAL, AUDIBLE AND VIBRATORY ALERT

Transverse rumble bars alert the driver to special road conditions or situations that might not be apparent. By using both audible and vibratory signals, PreMark® In-Lane Rumble Bars can help reduce driver risk and unsafe driving practices.

Situations where rumble bars could be effective include, but are not limited to, high incident areas, approaches to newly-installed stop signs or traffic lights, railroad crossings, signalized controlled intersections, work zones, toll facilities, hazardous curves, and rural high-speed intersections with sight restrictions.

PreMark® In-Lane Rumble Bars are made of high-performance preformed thermoplastic. The base layer is 125 mil PreMark® material but without the surface glass beads. The top layer is a preformed thermoplastic 250 mil PreMark® Rumble Bar that is flexible and conforms to the surface which eliminates breakage associated with rigid plastic and ceramic bars. PreMark® Rumble Bars are available in black, white, yellow and orange. Maintenance is easy as a new rumble bar section can be easily cut to fit any worn or damaged area.

Visit www.flintrading.com for more information and photographs.

PreMark® preformed thermoplastic is durable, convenient to use, easy to apply, and looks great, too.

ENHANCED DURABILITY

- Engineered as a heavy-duty intersection grade pavement marking, PreMark® provides optimum wear in adverse conditions.

PROPER INSTALLATION

- PreMark® does not require preheating of the pavement to a specific temperature prior to application. And with no road or air temperature requirements, you can install it anytime of year. However, salt, chemical and deicing compounds should be pressure washed or allow 2-3 rainfalls to occur before applying pavement markings.
- A recommended sealer is required when using PreMark® on concrete surfaces. The sealer enhances the bond strength by preventing moisture from penetrating up through the concrete.
- Installing PreMark® is fast, safe and cost-effective with an industrial propane heat torch such as the Flint 2000EX.

IMPERVIOUS TO OIL AND GAS

- PreMark® is oil and gas impervious, yet compatible with all asphalt surfaces. PreMark® can be inlaid or applied on fresh asphalt as soon as the road surface sets.


WORKER AND ENVIRONMENTAL SAFETY

- With no lead chromate or heavy metal compounds, PreMark® is non-hazardous, either during application or removal.

MANUFACTURING CONTROL

- All PreMark® preformed thermoplastic materials are made at Flint's manufacturing facility which is ISO 9001:2000 certified for design, development and manufacturing.

PreMark® Rumble Bars		
Description	Size Imperial	Item Number
Rumble Bar White	2" x 3'	8432058
Rumble Bar Black	2" x 3'	8432058BK
Rumble Bar Yellow	2" x 3'	8432058Y
Rumble Bar Orange	2" x 3'	8432058OR
Base White	4" x 3'	8432060NB
Base White	6" x 3'	8432061NB
Base White	8" x 3'	8432062NB
Base Black	4" x 3'	8432060BKNB
Base Black	6" x 3'	8432061BKNB
Base Black	8" x 3'	8432062BKNB
Base Yellow	4" x 3'	8432060YNB
Base Yellow	6" x 3'	8432061YNB
Base Yellow	8" x 3'	8432062YNB
Base Orange	4" x 3'	8432060ORNB
Base Orange	6" x 3'	8432061ORNB
Base Orange	8" x 3'	8432062ORNB

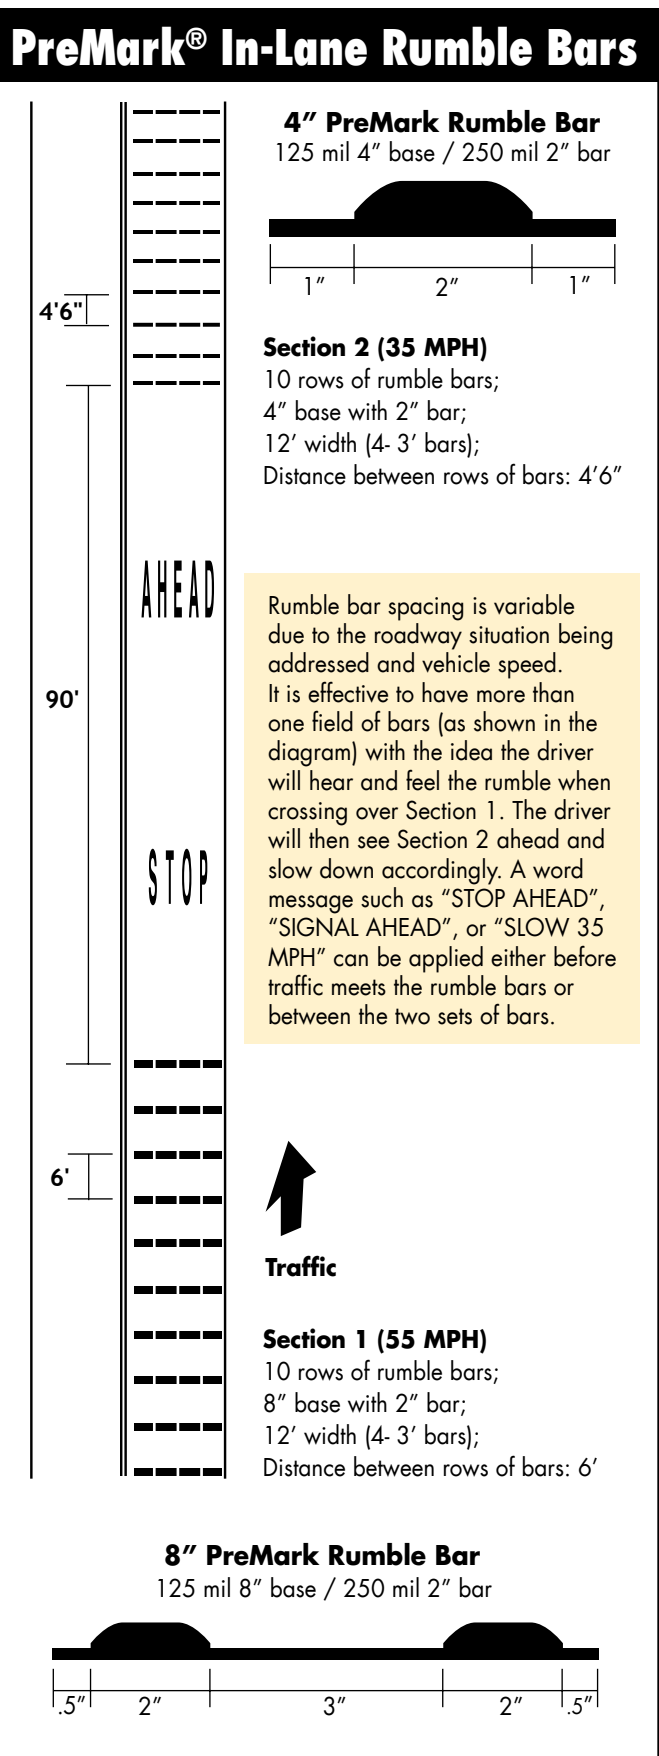

115 Todd Court • Thomasville, NC 27360
Phone: (336) 475-6600 Fax: (336) 475-7900

e-mail: sales@flintrtrading.com
website: www.flintrtrading.com